


Installation Manual




Notes

- This fitting requires 100-240V AC/50HZ power input to the driver.
- Do not interchange any parts of this fitting.
- Do not touch fitting when in use.
- Do not cover with any form of heat proof material.
- If you have any questions about the installation of this product, please contact Mondolux.



Installation Steps - Suspended

1. Ensure the mains power is turned off.
2. Mounted the wire rope suspend kit to the ceiling.
3. Mounted the brackets to the rope suspend kit by screw, recommend the distance between the chain : 382mm-0.6m; 982mm-1.2m; 1282mm-1.5m (Picture 1).
4. Installation is complete.

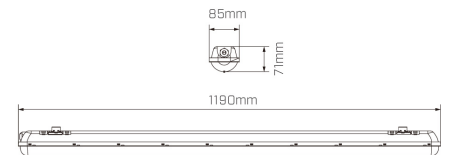


Installation Steps - Surface Mounted

1. Ensure the mains power is turned off.
2. Fasten the brackets to the mounting surface with the expansion screw. The distance between the brackets: 382mm-0.6m; 982mm-1.2m; 1282mm-1.5m (Picture 1).
3. Secure the fixture to the mounted bracket. (Picture 2).
4. Fasten the mounting bracket to the ceiling with expansion screw, then connect the lights with a cable and fix the lights to the bracket. (Picture 3).
5. Installation is complete.


Surface Mounted Installation

Picture 1

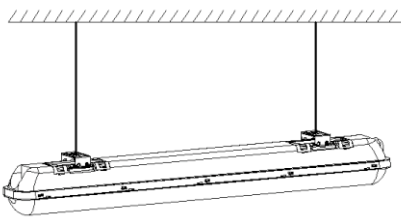


Suspended Installation

Picture 1

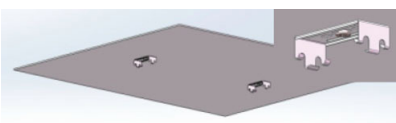

Picture 2

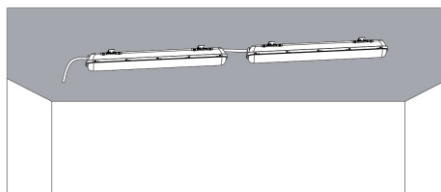

Picture 3

